




Series PNG

WHEEL

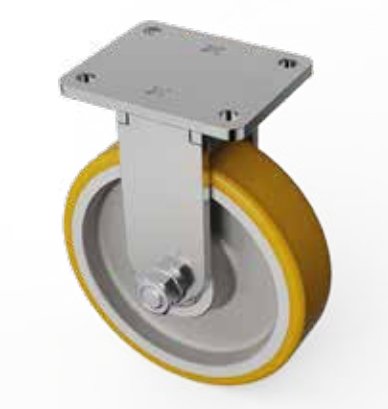

Made of cast iron core and thermoplastic polyurethane coating

Resistance to impact, abrasion and wear

The wheel can carry heavy loads while still guaranteeing excellent smoothness and almost complete protection of the floors

Excellent shape recovery of polyurethane from deformation

WHEEL FEATURES

DOUBLE BALL BEARING (DB)	DIAMETER	TYRE WIDTH	HUB WIDTH	BORE DIAMETER	OPERATING TEMPERATURE
PNG100DB	100	40	45	20	-20 +80
PNG125DB	125	50	60	20	-20 +80
PNG150DB	150	50	60	20	-20 +80
PNG200DB	200	50	60	20	-20 +80
PNG250DB	250	60	60	25	-20 +80
PNG300DB	300	80	80	30	-20 +80

HOUSINGS



Stainless steel housings are highly hygienic and corrosion resistant

They require little maintenance and remain shiny for many years without any protective coating or treatment

Moreover, the AISI 304 steel housing offers extreme resistance to nitric acid and good resistance to inter-granular corrosion, even after welding

AISI 304 STAINLESS STEEL HOUSINGS

FIXED	PLATE	PLATE + DIRECTIONLOCK	PLATE + WHEEL LOCK	PLATE + TOTAL BRAKE							
SP100F05.PNG100DB	SP100G05.PNG100DB	SP100GD5.PNG100DB	SP100GR5.PNG100DB	SP100GB5.PNG100DB	100	135x110mm	105x80mm	13mm	150mm	48mm	350
SP125F05.PNG125DB	SP125G05.PNG125DB	SP125GD5.PNG125DB	SP125GR5.PNG125DB	SP125GB5.PNG125DB	125	135x110mm	105x80mm	13mm	175mm	52mm	500
SP150F05.PNG150DB	SP150G05.PNG150DB	SP150GD5.PNG150DB	SP150GR5.PNG150DB	SP150GB5.PNG150DB	150	135x110mm	105x80mm	13mm	200mm	52mm	500
SP200F05.PNG200DB	SP200G05.PNG200DB	SP200GD5.PNG200DB	SP200GR5.PNG200DB	SP200GB5.PNG200DB	200	135x110mm	105x80mm	13mm	250mm	60mm	1000
SP250F05.PNG250DB	SP250G05.PNG250DB	SP250GD5.PNG250DB	SP250GR5.PNG250DB	SP250GB5.PNG250DB	250	175x140mm	140x105mm	13mm	313mm	70mm	1500
SP300F05.PNG300DB	SP300G05.PNG300DB	SP300GD5.PNG300DB	SP300GR5.PNG300DB	SP300GB5.PNG300DB	300	200x160mm	160x120mm	15mm	370mm	80mm	2200