

MAXIMA

SERIE DH

RUOTA IN POLIURETANO ANTISTATICO GRIGIO
ELECTRIC CONDUCTIVE GREY POLYURETHANE WHEEL


PORTATA - LOAD CAPACITY **Kg. 130 - 500**

Ruota stampata in poliuretano termoplastico **GRIGIO ANTISTATICO ANTITRACCCIA**. L'aderenza dell'anello battistrada al nucleo centrale è ottenuta con doppio ancoraggio meccanico. Corpo centrale in nylon scorrevole su cuscinetti a sfere DIN 625. Di serie le ruote su cuscinetto a sfere vengono fornite con doppia schermatura stagna 2RS.

ELECTRIC CONDUCTIVE GREY NON-MARKING thermoplastic polyurethane tyre wheel. The tread tyre is injected on the centre core by double mechanic anchoring. Central polyamide core on original ball bearings DIN 625. The original ball bearings on the wheel are supplied with 2RS water proof protection as standard.



RUOTA SU CUSCINETTI
WHEEL ON ORIGINAL BALL BEARINGS

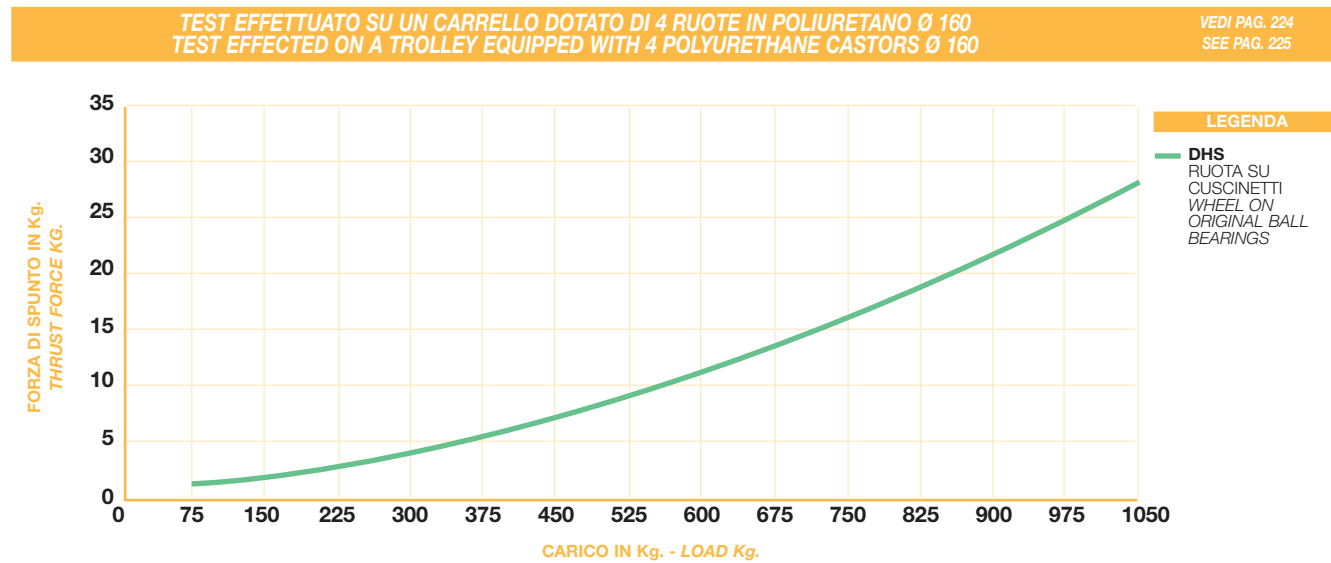

CARATTERISTICHE • FEATURES

90	DUREZZA • HARDNESS	Sh/A
-20 +70	TEMPERATURA • TEMPERATURE	°C
++	SCORREVOLEZZA • EASY RUNNING	
++	SILENZIOSITA' • NOISELESS	
++	ABRASIONE • SCRATCHING	
++	LACERAZIONE • TEARING	
++	COMPRESSIONE • COMPRESSION	

PAVIMENTAZIONE • KIND OF FLOORING

++	AMBIENTE ESTERNO • EXTERNAL ENVIRONMENT
++	AMBIENTE INTERNO • INTERNAL ENVIRONMENT
++	CEMENTO • CONCRETE
+	CERAMICA • GRES
+	ASFALTO • ASPHALT
--	STERRATO • ROUGHT TERRAIN
+	GRIGLIATO • MESH
-	TRUCIOLI • IRON CHIPS

RESISTENZA CHIMICA • CHEMICAL RESISTANCE

+	ACQUA • WATER
+	ACQUA SALATA • SALTED WATER
-	ACETONI • ACETONES
++	ALCOL • ALCOHOL
++	IDROCARBURI • HIDROCARBORS
+	ACIDI DEBOLI • WEAK ACID
-	ACIDI FORTI • STRONG ACID
-	BASI DEBOLI • WEAK BASES
--	BASI FORTI • STRONG BASES
-	SOLVENTI • SOLVENTS
+	OZONO • OZON

++ OTTIMO • VERY GOOD
 + BUONO • GOOD

- MEDIOCRE • RATHER GOOD
 -- PESSIMO • VERY BAD

mm	mm		TIPO TYPE	mm	mm	Kg. (da N)	ART.
60	25		6200 2RS	6	30	70	DHS060x25
80	25		6201 2RS	8	30	100	DHS080x25
80	32		6201 2RS	8	36	130	DHS080x32
100	25		6201 2RS	8	30	120	DHS100x25
100	32		6201 2RS	8	36	150	DHS100x32
125	25		6201 2RS	8	30	130	DHS125x25
125	32		6201 2RS	8	36	160	DHS125x32
125	46		6204 2RS	20	50	400	DHS125x46
150	32		6201 2RS	8	36	180	DHS150x32
150	32		6201 2RS	12	32	180	DHS150x32.12
160	46		6204 2RS	20	50	450	DHS160x46
200	32		6201 2RS	8	36	180	DHS200x32
200	32		6201 2RS	12	32	180	DHS200x32.12
200	50		6204 2RS	20	50	500	DHS200x50