




Componenti in acciaio stampato zincati galvanicamente.
Rotazione piastra su doppia corona di sfere in acciaio temperato.

Piste rotazione sfere calibrate e lubrificate.
Anello di protezione sfere antipolvere.
Perno ribadito per assemblaggio supporto.
Frenature integrali a pedale regolabile.

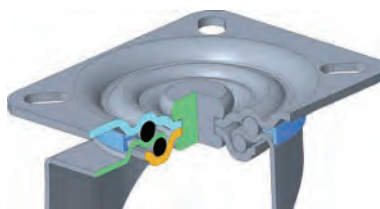

*Pressed steel, zinc-plated components.
Double ball races with hardened steel balls.
Calibrated and lubricated ball race tracks.
Dust protection ring.
Rivetted or bolted central pin for assembling.
Adjustable brake foot lever.*

girevole piastra / swivel castor

AKCIJA SERIE CXH

Cena: 10,00 EUR

cene so brez DDV

SERIE CXH



girevole foro per vite / bolt hole swivel castor



125x30	12	77	35	156	180	1CXH-1250QR0	180	3251
--------	----	----	----	-----	-----	--------------	-----	------

Varianti/Options



Zaloge omejene!

Montaža

Slika je simbolična



CARATTERISTICHE

Vengono realizzate con nucleo in nylon 6 e ricopertura in poliuretano termoplastico; assicurano una completa protezione dei pavimenti ed una totale assenza di rumore pur utilizzando un battistrada di durezza relativamente elevata (98 Shore A). Hanno un'ottima resistenza all'abrasione, agli oli minerali ed ai grassi. Possono presentare limitazioni di impiego in presenza di vapore acqueo. La temperatura d'impiego va da -20°C a +60°C

FEATURES

Made with a core of nylon 6 and a coating of thermoplastic polyurethane; these wheels ensure a complete protection of floors and a total absence of noise while using a tread of relatively high hardness (98 Shore A). They have excellent resistance to abrasion, mineral oils and greases. May have limitations for use in the presence of water vapor. The operating temperature ranges from -20°C to +60°C.

SERIE CXH




ART. (CODE)					
080 CXH (40080H01)	80	30	40	8	120
081 CXH (40080H02)	80	30	45	8	120
100 CXH (40100H04)	100	30	40	8	170
101 CXH (40100H05)	100	30	45	8 - 10	170
102 CXH (40100H03)	100	35	45	8 - 10	200
125CXH (40125H01)	125	35	45	8 - 10	180

Tel: 04/257 68 20

Gsm: 040/99 00 11

Componenti in acciaio stampato zincati galvanicamente.
Rotazione piastra su doppia corona di sfere in acciaio temperato.
Piste rotazione sfere calibrate e lubrificate.
Anello di protezione sfere antipolvere.
Perno ribadito per assemblaggio supporto.
Frenature integrali a pedale regolabile.

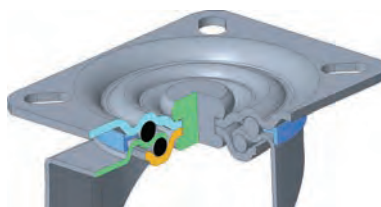

*Pressed steel, zinc-plated components.
Double ball races with hardened steel balls.
Calibrated and lubricated ball race tracks.
Dust protection ring.
Riveted or bolted central pin for assembling.
Adjustable brake foot lever.*

girevole piastra / swivel castor



100x30	105x85	80x60	9x16	38	128	1NPR1000GRO	120	2469

AKCIJA

Cena: 7,80 EUR

Zaloge omejene!

cene so brez DDV

RUOTE NUCLEO POLIAMMIDE RIVESTIMENTO IN POLIURETANO AD INIEZIONE

POLYAMIDE CENTRE WHEELS WITH INJECTED POLYURETHANE TREAD

Caratteristiche Ruota

Rivestimento in poliuretano ad iniezione colore rosso.
Struttura portante poliammide 6 colore neutro
Movimento mozzo:
alesaggio passante
gabbia a rulli inox
gabbia a rulli con pista di scorrimento in acciaio inox
Temperatura d'impiego da -15°C a $+60^{\circ}\text{C}$.
Buona resistenza agli aggressivi chimici.
Durezza battistrada 92/98 Sh.A
Buona resistenza all'abrasione
Velocità massima di lavoro 4 km/h.
Mezzo di trazione consigliato: manuale

Wheel Features

Red injected polyurethane tread.
White high density polyamide 6 centre wheel.
Type of bearing:
plain bearing
stainless steel roller bearing
stainless steel roller bearing with stainless steel tube.
Temperature range: from -15°C to $+60^{\circ}\text{C}$.
Good resistance to chemicals.
Tread hardness 92/98 Sh.A
Good resistance to abrasion.
Max. working speed 4 KPH.
Operation: manual.



Pavimentazioni Idonee / Floring Type



80x30	ONPA080012	12x40	125	ONPR080012	12x40	125			
100x30	ONPA100012	12x40	150	ONPR100012	12x40	150			
100x40							ONPE100A15	15x46	175
125x30	ONPA125015	15x46	200	ONPR125015	15x46	200			
125x40	ONPA125A20	20x60	250				ONPE125A20	20x60	250
150x35	ONPA150015	15x46	225	ONPR150015	15x46	225			
150x45	ONPA150A20	20x60	350				ONPE150A20	20x60	350
175x45	ONPA175020	20x60	400						
200x50	ONPA200020	20x60	550				ONPE200020	20x60	550
250x60	ONPA250025	25x75	800						

Zaradi napetega dela v tekalnem delu, lažje obračanje!

Varianti / Options



Parafili in lega leggera
Light Metal thread guards

Le dimensioni riportate sulle pagine del nostro catalogo sono espresse in millimetri
All dimensional sizes shown on our catalogue are in millimeters.